


coaxial valve

type VSV-F 100

5-VSV-F 100

valve type with pilot valve

**2/2 way valve externally controlled****pressure range** PN 0-40 bar**orifice** DN 100 mm**connection** flange**function** valvenormally closed
symbol NCvalve
normally open
symbol NO**design** pressure balanced, with spring return**body materials** ① aluminium

② steel, galvanized

③

⑤ without non-ferr. metals

④ steel, nickel plated

⑥ stainless steel

valve seat synthetic resin on metal**seal materials** NBR

PTFE, FPM, CR, EPDM

⚠ Above stated body materials refer to the valve port connections that get in contact with the media only!

details needed for main valve

- orifice
- port
- function NC/NO
- operating pressure
- flow rate
- media
- media temperature
- ambient temperature
- type of actuation

details needed for pneumatic actuation

- nominal voltage
- type of protection
- actuation pressure range min/max
- low wattage coil, actuation pressure range 4-7 bar
- pilot valve type

details needed for hydraulic actuation

- actuation pressure range min/max
- hydraulic control valve function

general specifications**ports** VSV-F flanges PN 16/40**options****function** NC

special flanges

pressure range bar 0-16/0-40

NO

Kv value m³/h 140,0**vacuum** leak rate < 10⁻⁶ mbar·l·s⁻¹**pressure-vacuum** P₁ ↔ P₂

pressure side max. 40 bar

back pressure P₂ > P₁vacuum side leak rate < 10⁻⁶ mbar·l·s⁻¹**media** gaseous - liquid - highly viscous - gelatinous - pasty - contaminated

available (max. 16 bar)

abrasive media

version available

damping**opening****closing****by throttles on pilot valve****flow direction** A → B as marked

bi-directional upon request

switching cycles 1/min 40**switching time** ms opening 300-3000 closing 300-3000**media temperature** °C direct mounted pilot valve 60

remote mounted pilot valve outside temperature range of media max. 160°C

ambient temperature °C direct mounted pilot valve 50

available

flush ports

available

leak ports

inductive/mechanical upon request

limit switches**manual override****approvals****mounting****weight** kg VSV-F 38,0

upon request

electrical specifications**nominal voltage** U_n DC 24V

special voltage upon request

U_n AC 230V 50 Hz

special voltage upon request

DC 4,8 W

2,5 W

AC pick up 11,0 VA holding 8,5 VA

IP 65 (P54) acc. DIN 40 050

ED 100%

plug acc. DIN EN 175301-803 form B, 4 positions x 90° / wire diameter 6-8 mm

illuminated plug with varistor

M12x1 connector acc. DESINA

connector acc. VDMA

media 60°C

ambient 50°C

EEEx m II T5 nominal voltage U_n

direct current 24 V 3,25 W

power consumption

alternating current 230 V 50 Hz 2,90 W

pneumatic specifications**actuation pressure range** bar 4-10**options**air consumption cm³/stroke 135


main valve speed variable by throttles on pilot valve

preferably 5/2-way pilot valve

2/4 G 1/4


G 3/8

function: NC closed when not energized

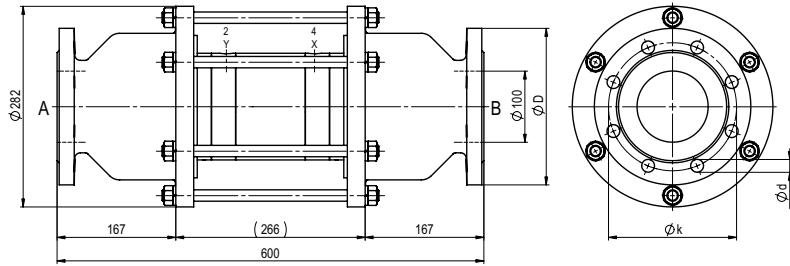


function: NO open when not energized


flanges PN	DIN	ØD	Øk	Ød
16	2633	220	180	18
40	2635	235	190	22

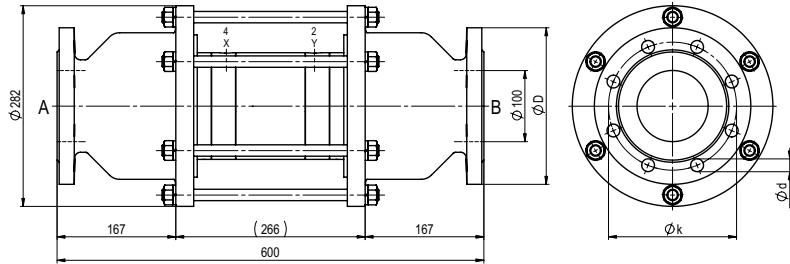

pneumatic actuation (separately)



5/2-way-pilot valve
flow rate 700 l/min
pressure range 3-10 bar G 1/8



5/2-way-pilot valve ISO 1
flow rate 700 l/min
pressure range 3-10 bar G 1/4

The application-specific layout relating to temperature, pressure conditions, switching behavior, media and its consistency may restrict the range of use or necessitate relevant modifications to materials used and seal arrangements.

Rights reserved to make technical alterations

• Not responsible for printing errors

• Detailed drawings can be obtained upon request